



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET



- ▶ Ceramic SMD
- ▶ 1616 1.7t Series
- ▶ Infrared (IR) 850nm

NOF66S34



Release Date: 06 August 2024 Version: A1.0



1616 1.7t Series

1616 1.71t Series

RoHS Compliant



**AUTOMOTIVE
AEC-Q102**

FEATURES:

- **Package:** Ceramic Single Junction SMT Package
- **Forward Current:** 1A
- **Forward Voltage (typ.):** 1.7V
- **Radiant Power (typ.):** 600mW@1A
- **Radiant Intensity (typ.):** 310mW/sr@1A
- **Colour:** Infrared (IR)
- **Peak Wavelength (typ.):** 850nm
- **Viewing Angle:** 80°
- **Materials:**
 - Resin: Silicon (Water Clear)
- **Operating Temperature:** -40~+105°C
- **Storage Temperature:** -40~+105°C
- **Grouping Parameters:**
 - Forward Voltage
 - Radiant Power
 - Peak Wavelength
- **Soldering Methods:** Reflow
- **MSL Level:** MSL 1 according to J-STD020
- **Corrosion Robustness Class:** A
- **Packing:** 8mm tape with max.2000pcs /reel, ø178mm (7")

APPLICATIONS:

- Automotive
- Security Camera
- Motion Detection
- Night Viewer
- Surveillance
- Data Communication
- Facial Recognition
- Gesture Recognition

CHARACTERISTICS:

Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I _F	1	A
Pulse Forward Current	I _{PF}	2	A
Power Consumption	P _{tot}	2	W
Reverse Voltage	V _R	5	V
Reverse Current @5V	I _R	10	μA
Junction Temperature	T _j	115	°C
Thermal Resistance Junction	R _{th}	typ. 8.5 max. 12	K/W
Electrostatic Discharge (HBM: MIL-STD-883 C 2)	ESD	2	kV
Operating Temperature	T _{OPR}	-40~+105	°C
Storage Temperature	T _{STG}	-40~+105	°C
Soldering Temperature	T _{SOL}	260	°C

1. When drive on maximum current, Junction temperature must be kept below 115°C.


Electrical & Optical Characteristics (Ta=25°C, I_F=1A, t_p=10ms)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V _F	1.4	1.7	2.0	V	I _F =1A
Radiant Power	Φ _e	400	600	700	mW	I _F =1A
Radiant Intensity	I _e	250	310	360	mW/sr	I _F =1A
Peak Wavelength	λ _p	---	850	---	nm	I _F =1A
Spectral Bandwidth	Δλ	---	45	---	nm	I _F =1A
Viewing Angle	2θ _{1/2}	---	80	---	deg	I _F =1A

2. Radiant Power (P_o) ±10%, Forward Voltage (V_F) ±0.1V, Viewing angle(2θ_{1/2}) ±10°


OUTLINE DIMENSION:

Package Dimension:

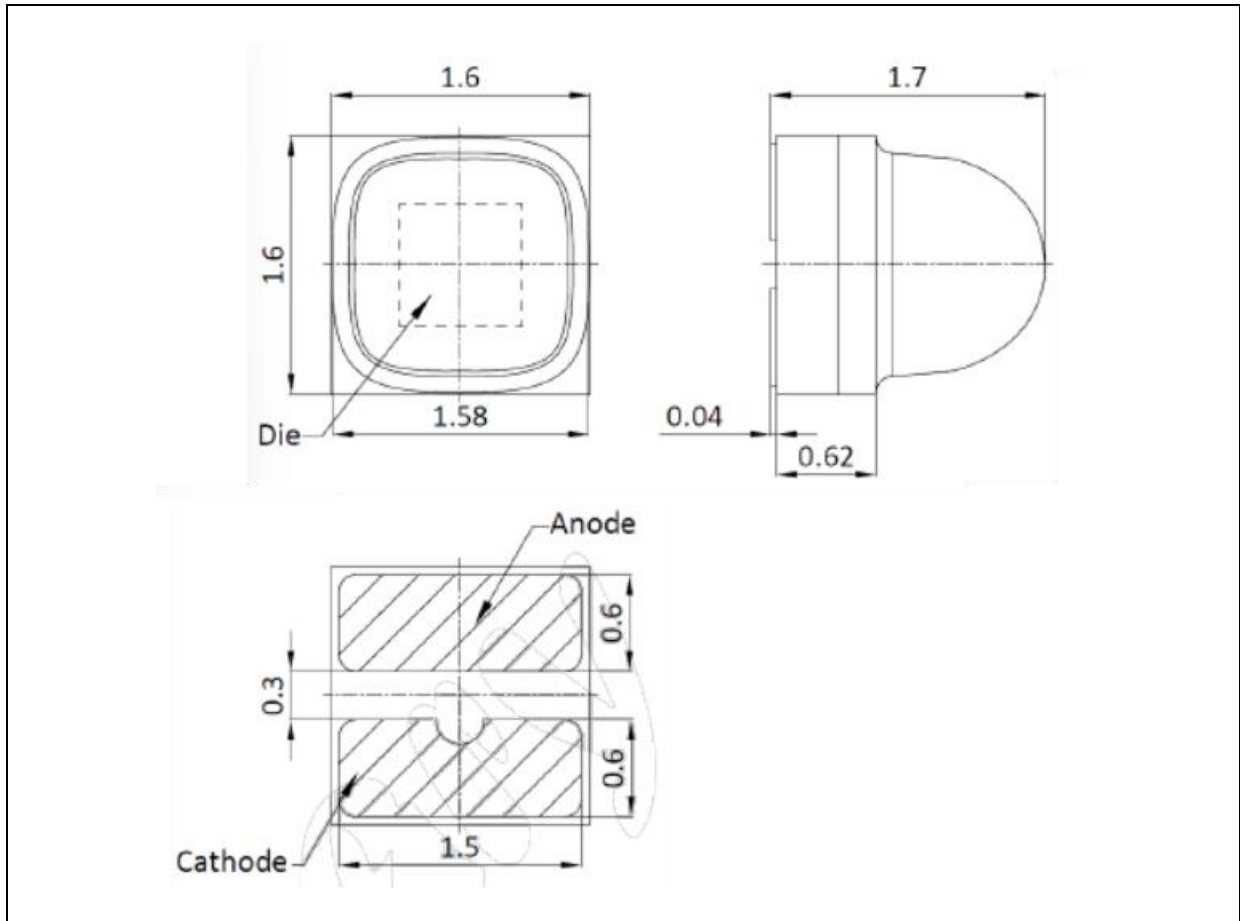

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.05\text{mm}$, unless otherwise noted.

Recommended Soldering Pad Dimension:

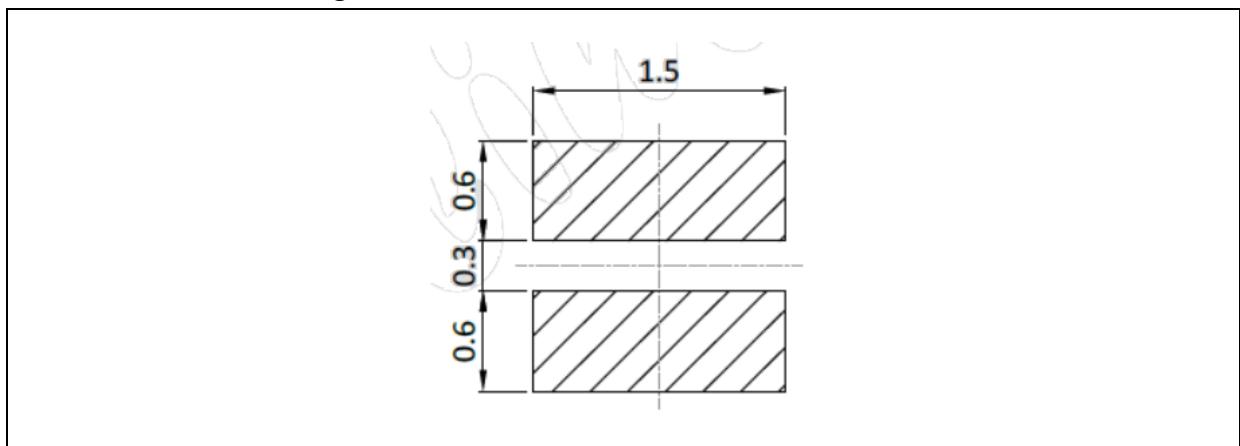

1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.12\text{mm}$ with angle tolerance $\pm 0.5^\circ$.

BINNING GROUPS:

 Forward Voltage Classifications ($I_F=1A$, $t_p=10ms$):

Code	Min.	Max.	Unit
CE	1.4	2.0	V

 Radiant Power Classifications ($I_F=1A$, $t_p=10ms$):


Code	Min.	Max.	Unit
PA4	400	500	mW
PA5	500	600	
PA6	600	700	

 Peak Wavelength Classifications ($I_F=1A$, $t_p=10ms$):


Code	Min.	Max.	Unit
F3	840	870	nm

ELECTRO-OPTICAL CHARACTERISTICS:


Radiant Power v.s. Forward Current

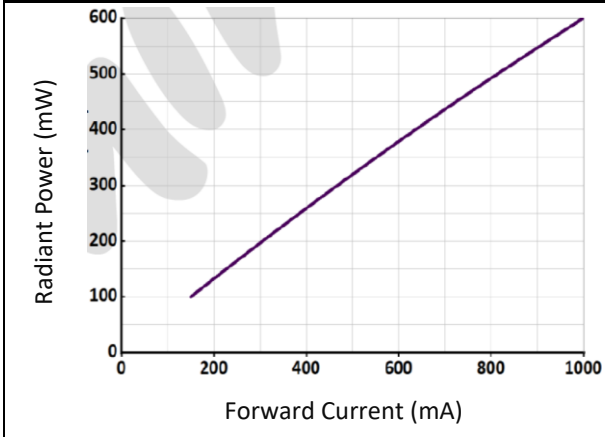


Radiant Intensity v.s. Forward Current

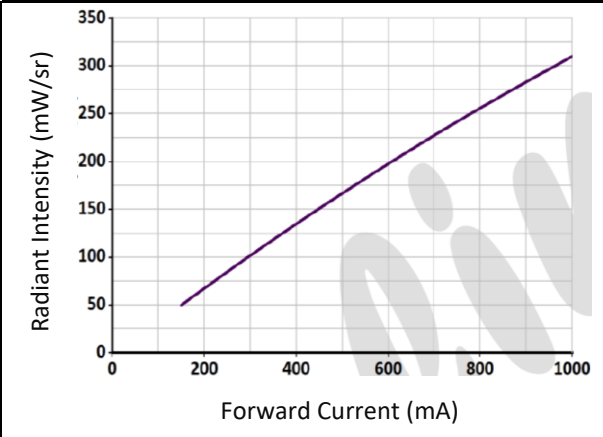


Relative Spectral Power v.s. Wavelength

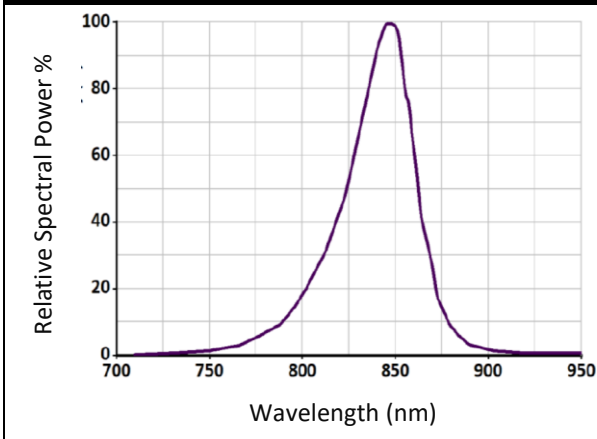


Directive Radiation

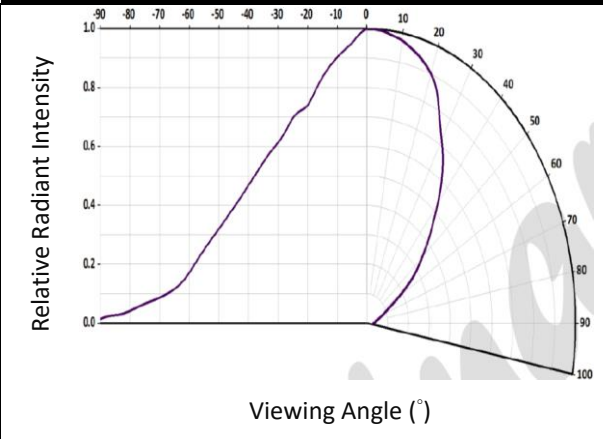

Forward Current v.s. Forward Voltage

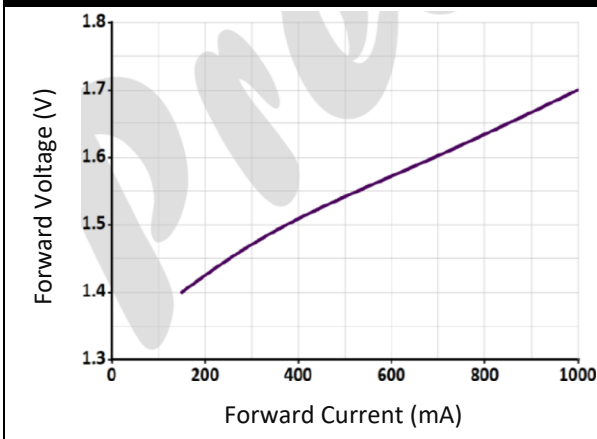


Permissible Pulse Handling Capability
 $IF=f(t_p)$; $D=Duty$; $T_{amax}=85^\circ$

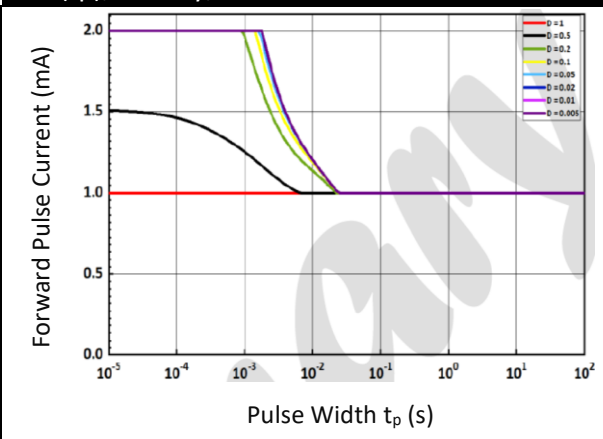

ELECTRO-OPTICAL CHARACTERISTICS:


Permissible Forward Current

$I_{Fmax}=f(T_s)$; $R_{thjs}=12K/W$

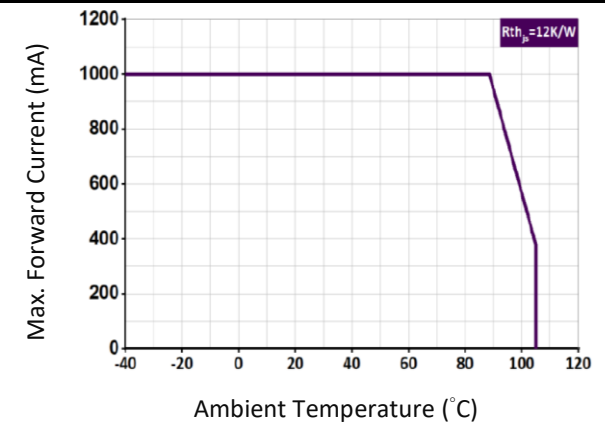

RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

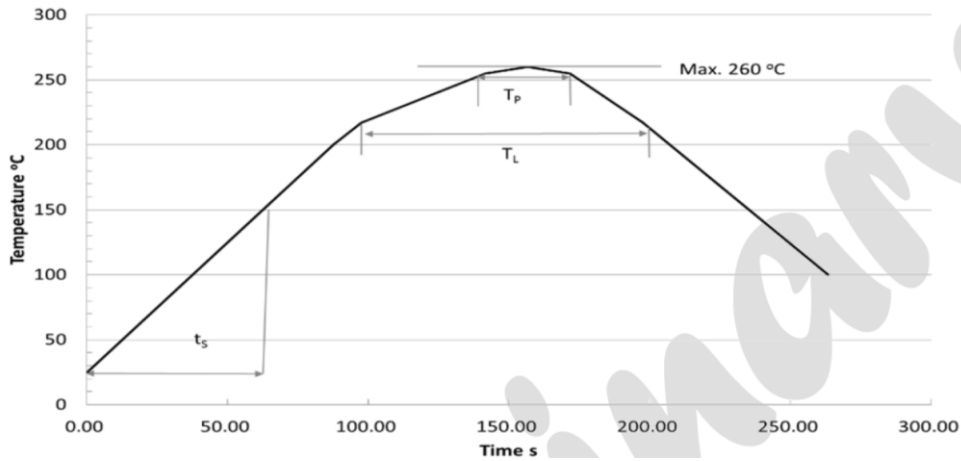


Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		Minimum	Recommendation	Maximum	
Ramp-up rate to preheat 25 °C to 150 °C			2	3	K/s
Time ts T _{Smin} to T _{Smax}	t _s	60	100	120	s
Ramp-up rate to peak T _{Smax} to T _P			2	3	K/s
Liquidus temperature	T _L		217		°C
Time above liquidus temperature	t _L		80	100	s
Peak temperature	T _P		245	260	°C
Time within 5 °C of the specified peak temperature T _P - 5 K	T _P	10	20	30	s
Ramp-down Rate T _P to 100 °C			3	4	K/s
Time 25 °C to T _P				480	s

Note:

1. Maximum reflow soldering: 2 times.
2. The recommended soldering temperature is 245°C. The maximum soldering temperature should be limited to 260°C.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.

PACKING SPECIFICATION:

Reel Dimension:

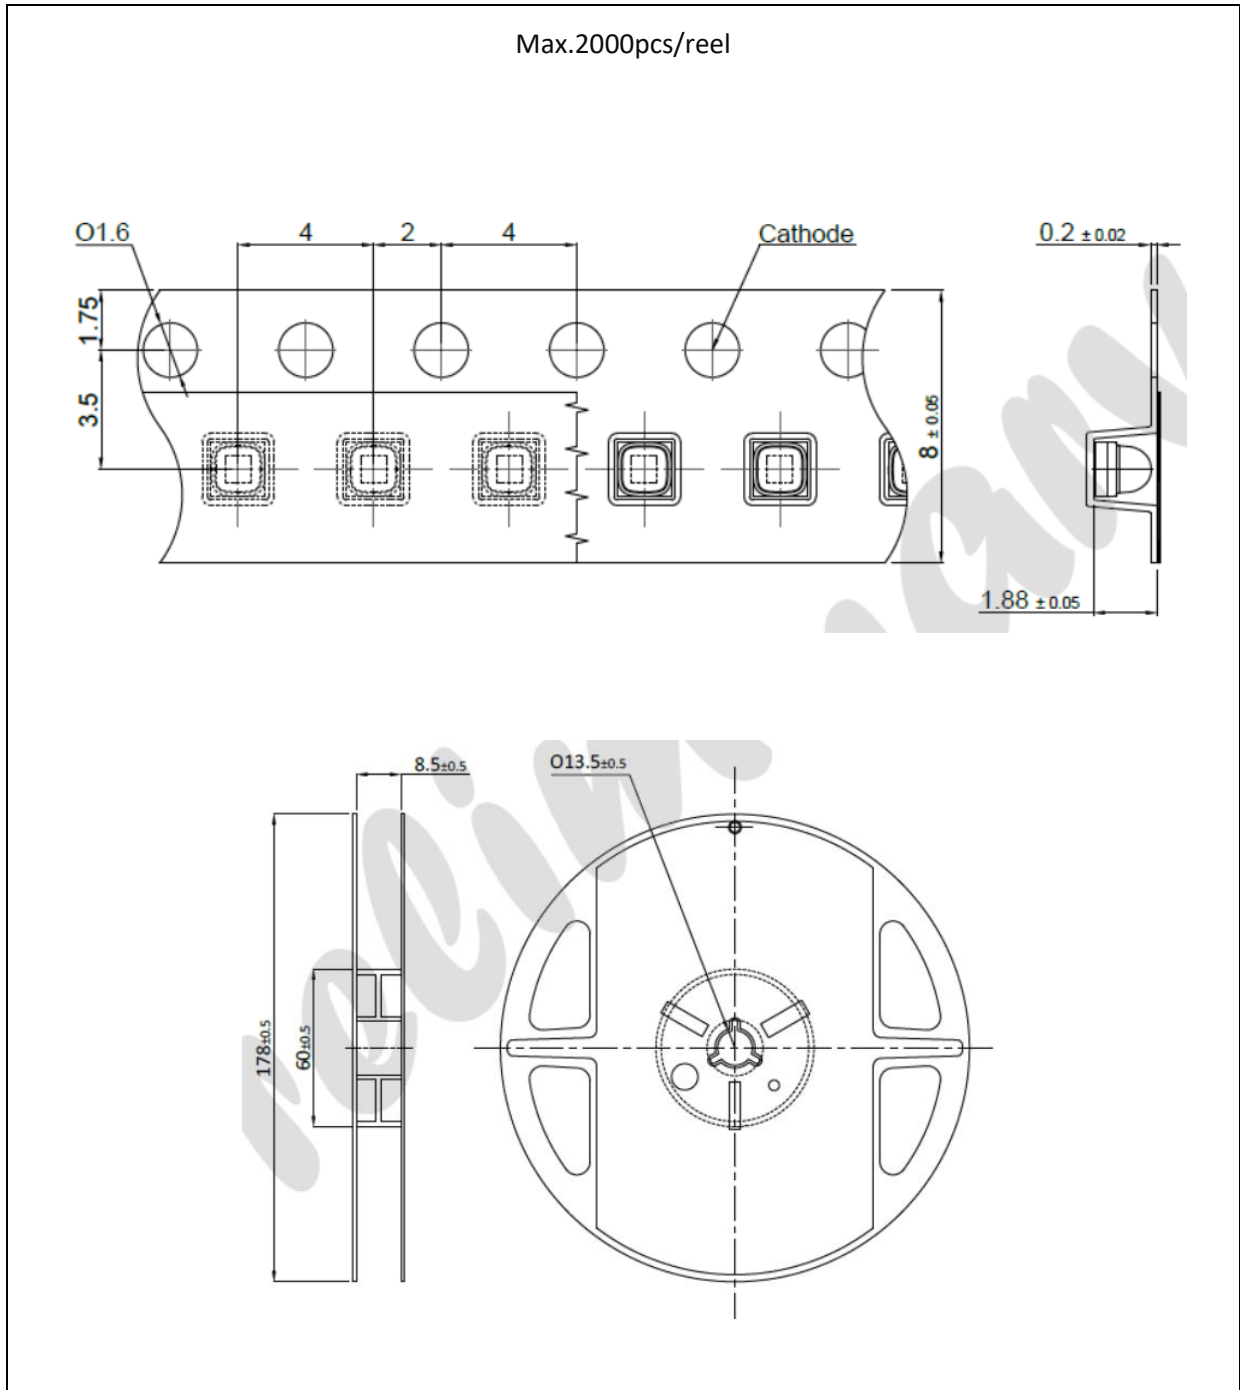

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±3°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	06/08/2024	Datasheet set-up.